

Emergency Stainless Steel Combination Shower with Hand/Foot Operated Eyewash

ECE090

Enware's emergency safety showers assist in the rapid removal of contaminants from the body with a deluge of flushing fluid and eyewash units flush hazardous contaminants and irritants from eyes.

Designed and manufactured in Australia.

Stainless steel construction provides superior durability and reliability.

Features

- Independently tested for compliance to ANSI Z358.1 and AS4775
- Freestanding for stand-alone operation
- Stainless steel pipe work and stay-open ball valve
- Stainless steel 200 mm (8") shower head assembly
- Stainless steel pull rod activated shower with high visibility yellow epoxy coating
- Push or foot activated eyewash with soft aerated flow and integral auto-open dust covers
- Zero velocity eyewash apex point provides more comfort and control for effective cleansing of eyes
- Self-draining design reduces Legionella risk, particularly tepid water applications
- Solid stainless, low angle foot pedal for easy activation of eyewash
- High visibility yellow epoxy coated push handle and foot pedal
- Balanced simultaneous operation

Product Codes

ECE090	Standard Brushed Stainless Steel Finish
ECE090GR	Green Epoxy Powder coated Finish
ECE090OR	Orange Epoxy Powder coated Finish
ECE090YE	Yellow Epoxy Powder coated Finish
ECE090WH	White Epoxy Powder coated Finish




Additional options:

- Audio/Visual alarms for alerts
- Flow pressure and proximity switches to activate alarms & lights
- Thermal relief valve removes built-up hot water
- Insulation of pipework to moderate water temperature build up
- Anti-freeze valve for cold weather applications
- NPT flange connectors
- Custom manufacturing & design
- Standards compliant signage

Technical Information

Inlet Connection	25 mm (1") BSP
Water Supply Line Size	Must be hydraulically sized to meet requirements.
Minimum Performance Requirements	Min Working Pressure: 210 kPa Caution should be taken when pressure exceeds 550 kPa (80 psi) Shower: Min Flow Requirements: 76 lpm (20 US gpm) Eyewash: Min Flow Requirements: 17 lpm (4.5 US gpm)
Waste Water Outlet Size	38 mm (1 1/2") OD
Mounting Base Plate	Size: 150 x 150 mm (5 9/16" x 5 9/16") with 4 Bolt Holes 11 mm (7/16")
Shipping	Weight: approx. 12.7kg Dimensions: 1160 x 300 x 250 mm

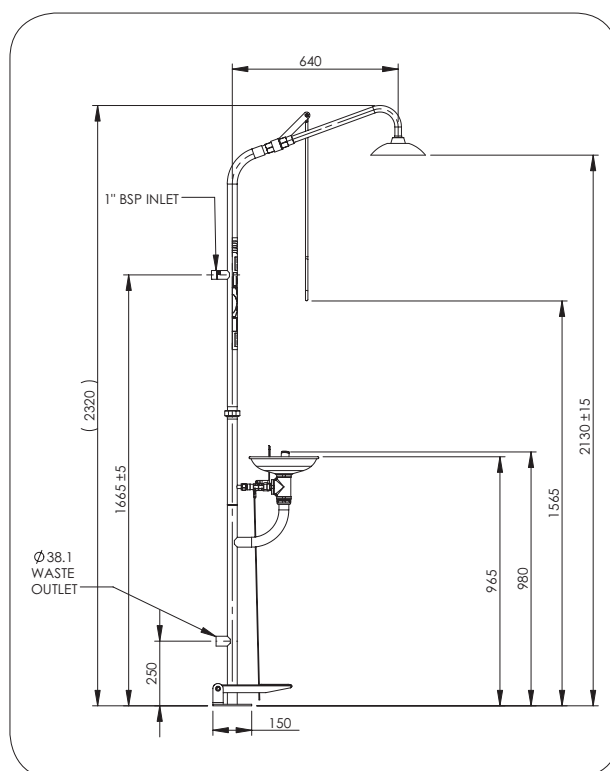

FEB12